

## 500L JOJO BACKWASH TANK

**INNOVATIVE DESIGN THAT ALLOWS FOR POOL BACKWASH WATER TO BE SAVED AND RE-USED**

### FEATURES INCLUDE:

- Made from transparent UV resistant polymer so that water quality is visible.
- Purpose located tap off points are provided to ensure only clean water is returned to your pool and dirty water can be used in your garden.
- Lightweight and durable for both mobile and permanent application.



### TANK DIMENSIONS

**LITRE**  
500L

**TANK HEIGHT**  
1 080mm

**DIAMETER**  
840mm

**WEIGHT (WHEN EMPTY)**  
13kg

**LID**  
480mm Clip-on Lid with E-clips

### THE BACKWASH TANK INCLUDES:


- Inlet - 40mm Female Fitting
- Overflow - 40mm Female Fitting
- Outlet - 40mm Water Fitting
- 20mm Fitting & 20mm Tommy Tap
- 20mm Tap Connector
- 25mm Ball Valve, 40/25mm Reducer & 25mm Barrel Nipple (Fitted as one assembly)
- 20mm Accessory Adaptor

### ADDITIONAL COMPONENTS REQUIRED


- Standard garden hose to move water from tank back to pool and to garden.
- A 40mm layflat hose is recommended to transfer water from pool filter back wash to the tank.



## INSTALLATION / ASSEMBLY

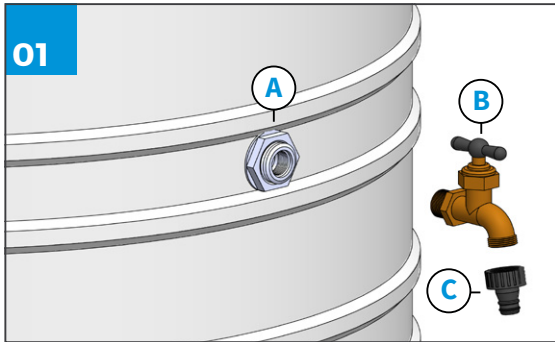


Fit Tommy tap (B) to 20mm water fitting (A) on the tank and 20mm tap connector (C) to the tap.  
**NOTE: Tap is used to return clear water to the pool.**

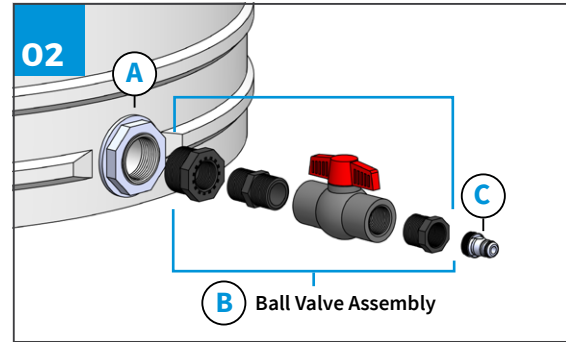


Fit ball valve assembly (B) to 40mm inlet (A) at the bottom of the tank, then fit the accessory adaptor (C) to the ball valve assembly. **NOTE: The ball valve will be used to return settled pool waste to the garden.**


## APPLICATION

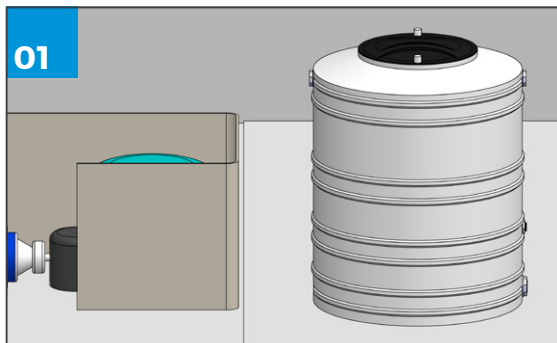


Place tank in the desired location relative to filter and pool. Ensure that it is placed on a base that is sound, level, smooth, free from any protrusions and at least 100mm wider than the base of the tank.

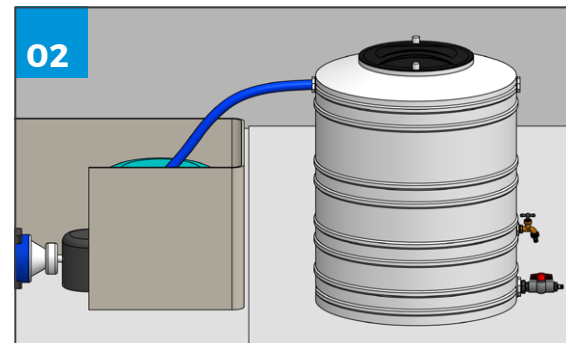

a) Connect a 40mm layflat hose from your pool backwash line to your overflow/inlet at the top of the tank.  
b) Backwash your pool and fill the tank with your backwash water. Allow the water to settle.

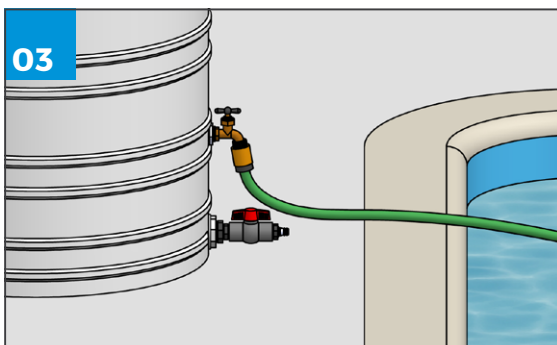

Connect a hose to the 20mm tap connector and return the clear water to the pool.

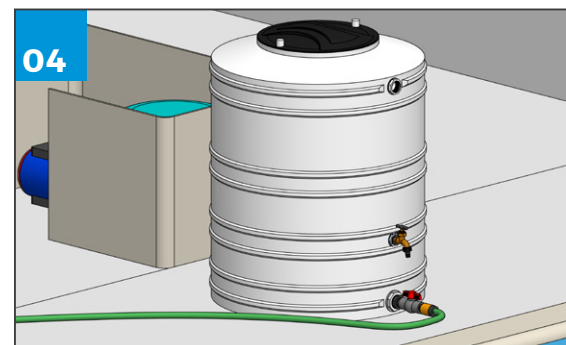

When this is complete, connect a hose to the accessory adaptor on the ball valve assembly and divert the dirty water into the desired area in your garden.